




### Thermo-module type: FM-BT-12706

#### 性能参数


#### Performance parameters

项目 Item	性能指标 Performance data	测试条件 Test Condition
开路电压 Open Circuit Voltage	2.6V	Th=80°C、Tc=30°C
输出功率 Load Power	560 mW	Th=80°C、Tc=30°C Load Resistance: 2.17Ω
输出电压 Load Volt	1.2V	
电阻 Resistance	1.9 Ω ± 10%	at: 298K
最高使用温度 Max operating temperature	200°C	瞬间温度 Instantaneous temperature

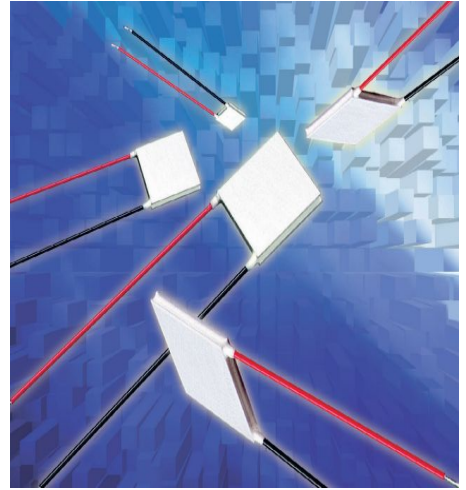

#### 外形图

#### Outline drawing

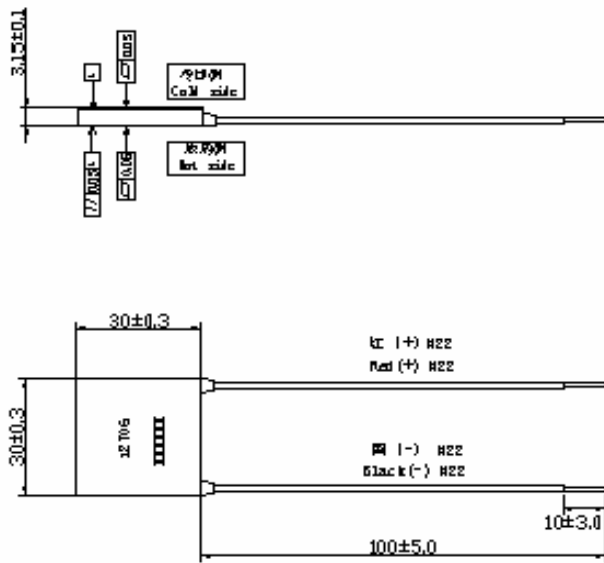

注: 在冷侧面打印型号及批号  
 Note: print type and lot number on the cold side surface

#### Contact us:

Address: 20<sup>th</sup> Zhujiang Road, Economic and Technological Development Zone, Qinhuangdao Hebei China

Tel: 0086-335-5909138

Fax: 0086-335-5909140

Web: [www.chinafujitaka.com](http://www.chinafujitaka.com)